## **MULTI-CARRIER TRANSMITTER**

JP2001168837

Publication date: \$42001-06-22

Inventor: HARA YOSHITAKA: KAMIO YUKIHIDE

YRP MOBILE TELECOMMUNICATIONS KEY TECH

RESILABICO LTD#MITSUBISHI ELECTRIC CORP

european:

Application number: JP19990347272 19991207 Priority number(s):

Report a data error her


## Abstract of JP2001168837

PROBLEM TO BE SOLVED: To provide a multi-carrier transmitter that requires no broad frequency band and does not cause a high

peak in a signal waveform. SOLUTION: Information data 1 are copied and supplied to plural branches. Data delay sections 2a-2m respectively delay the information data 1 by a prescribed time each. sign multiplier sections 3a-3m multiply one chip each of spread codes C1-CM respectively with the data. Furthermore, multi-carrier arithmetic sections 4a-4m obtain each subcarrier assigned to each concerned branch from among a plurality of carriers and having a prescribed frequency interval, and a data signal synthesis section 5 synthesizes the subcarriers to convert them into a transmission signal on a time base. Then a frequency conversion section 6 converts the frequency of the transmission signal into a transmission frequency and a transmission antenna 7 transmits the transmission signal with the converted frequency. Thus, the information data 1 are transmitted by a plurality of the subcarriers modulated by the one information

data 1 allocated in a two-dimensional region

which of time and frequency.

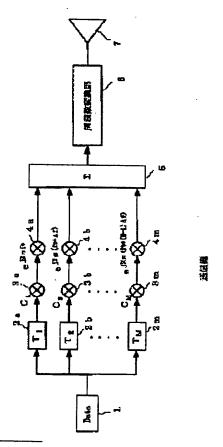

Data supplied from the esp@cenet database - Patent Abstracts of Japan

## **Best Available Copy**